




Universal LightProbe™ FIBER - OPTIC PROBE

Part number: XXX-34-RSL-WA-CT

Plastic Collar
O.D. 0.134 in.

Retractable Stainless-Steel Tip for LED interface

Stainless-Steel Sleeve
O.D. 0.134 in.

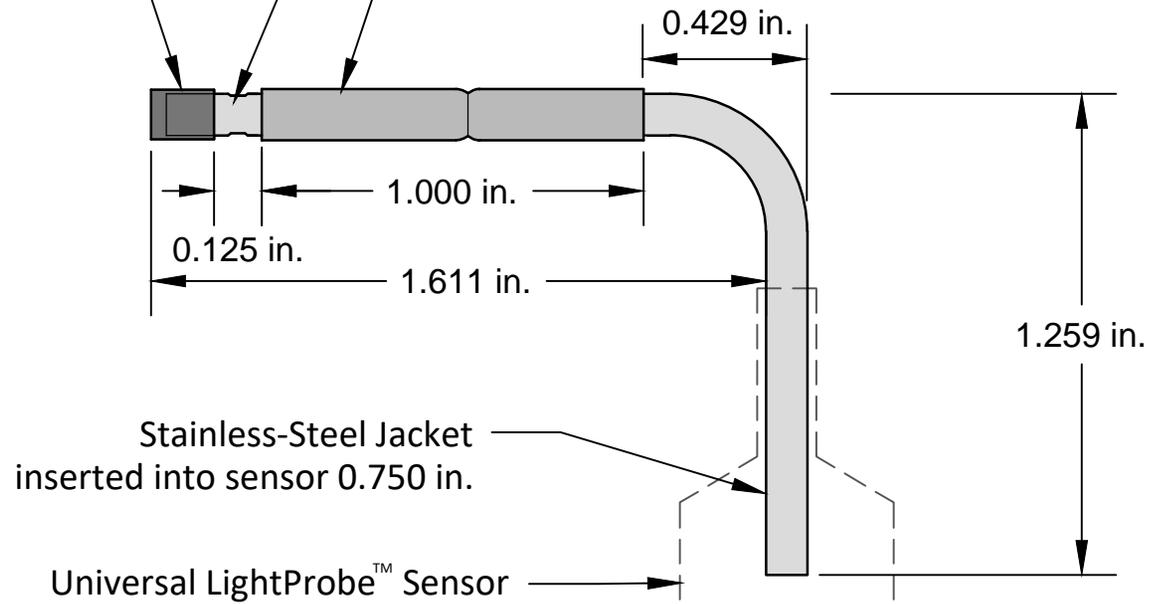

PROPRIETARY DATA

This drawing contains information and data which is proprietary to Optomistic Products and shall not be reproduced/copied without the prior written consent of Optomistic Products

NOTES:

1. Fiber-optic probes should be installed with the stainless-steel sleeve retracted halfway ($\frac{1}{16}$ ") when contacting the LED.
2. Tolerances - Length: Stainless Steel: ± 0.010 in. (0.25mm)

Scale 2:1